MICRO-SPRINKLERS

NaanDanJain's wide selection of micro-sprinklers enables our teams to tailor highly customized solutions for every application. Offering a high level of accuracy, uniformity and reliability, the micro-sprinkler range includes sprayers, rotors, misters and foggers.

NAANDANJAIN
Irrigation

NAANDANJAIN
Irrigation

CONTENTS

Introduction.....3
Modular Group.....4-5
Hadar 7110.....6-7
AquaMaster 2005.....8-9
AquaSmart 2002.....10-11
Dan 2001.....12-13
Eliminator.....14-15
Dan-Jet PC.....16-17
Turbo-Jet.....18-19
Flipper.....20-21
Green Spin.....22-23
Green Mist.....24-25
Fogger.....26-27
Super Fogger.....28
Hurricane.....29
Super LPD (Leakage Prevention Device).....30-31
Accessories.....32-35

© NAANDANJAIN Ltd. 02/2011

INTRODUCTION

Micro-sprinkler irrigation is a major pressurized micro-irrigation method.
The advanced plastic molding technology allows for the development and manufacture of water emitters with extreme diversity of flow rates, distribution patterns and droplet sizes.

Micro-sprinkler irrigation has numerous applications, including:

- Undertree irrigation of fruit trees
- Irrigation in greenhouses and nurseries
- Irrigation of landscapes and residential gardens
- Frost protection in orchards and vineyards
- Climate control (cooling and humidification) in greenhouses, poultry houses and livestock areas
- Pesticide spraying in greenhouses and orchards

NaanDanJain is a world leader in the development and marketing of the most advanced micro-sprinkler irrigation technologies. The company offers the widest selection of micro-sprinklers, providing tailor-made solutions for all applications, with a high level of accuracy, uniformity and reliability.

© NAANDANJAIN Ltd. 02/2011

NAANDANJAIN Irrigation

MODULAR GROUP

Complete range of micro-sprinklers and micro-jets

APPLICATIONS

- Irrigation in orchards, vegetables and gardens
- Irrigation in greenhouses and shade houses
- Cooling of poultry and livestock

STRUCTURE AND FEATURES

Broad range of wetted diameters and flow rates

- Full- and part-circle patterns
- Small, medium or large droplets produced by different sprayers, swivels or anti-mist devices

Jardi Modular
with unique mini-valve

© NAANDANJAIN Ltd. 02/2011

NAANDANJAIN
Irrigation

TECHNICAL DATA

- Recommended working pressure: 1.5-3.0 bar
- Flow rate: 25-400 l/h
- Wetted diameter: 1-10 m
- Filtration requirement: 130 micron for purple and brown nozzles
  200 micron for other nozzles

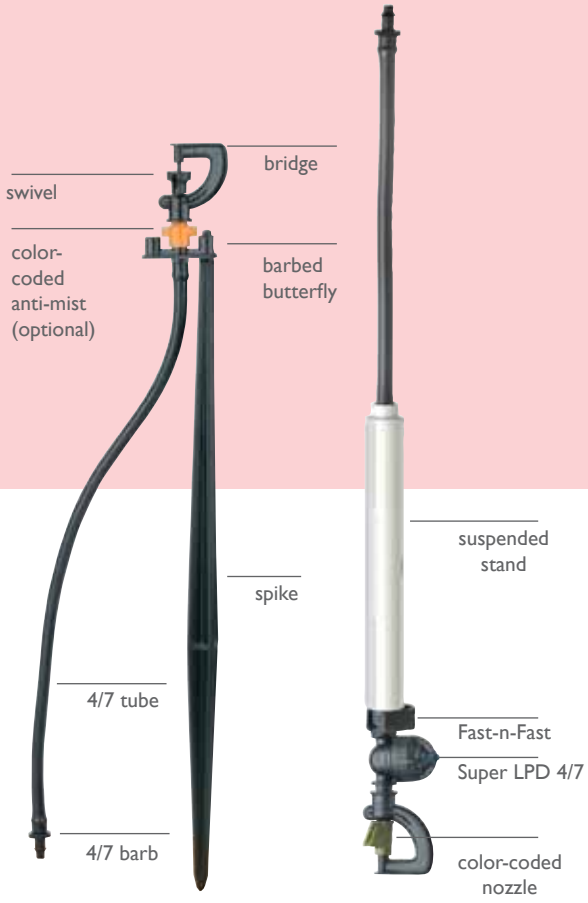

MODULAR NOZZLE AND FLOW RATE VS. PRESSURE

Color	Flow rate (l/h)	Nozzle ID (mm)	Pressure (bar)					
			1.0	1.5	2.0	2.5	3.0	3.5
Violet	35	0.82	25	30	35	39	43	46
Brown	43	0.94	32	37	43	50	55	60
Grey	70	1.16	49	60	70	78	86	93
Green	105	1.41	74	90	105	117	129	139
Orange	120	1.50	85	105	120	134	147	159
Yellow	160	1.73	113	140	160	179	196	212
Blue	200	1.92	141	170	200	224	245	265
Ivory	235	2.07	166	204	235	263	288	311
Red	260	2.18	184	225	260	291	318	344
Black	300	2.34	212	260	300	335	367	397

WETTED DIAMETER (m) AT 2.0 BAR AND 0.25 m ABOVE GROUND LEVEL

Anti-mist color (Ø)	Nozzle color	Flow rate (l/h)	Nozzle ID (mm)	Static Spreaders							Swivels						
				90°	180°	Mist sprayer	Strip	Close-range spreader	Flat	12 Jet	Small black	Anti-ant	One-sided black **	One-sided blue **	Big orange	Inverted * Height (m)	
																0.60	1.80
	Violet	35	0.82	1.7	2.2	1.5	3.2	0.9	2.8	3.4	5.5	6.0	6.5			5.0	6.0
	Brown	43	0.94	1.7	2.5	1.8	4.2	0.9	3.4	4.5	5.5	6.0	6.5			5.5	6.5
	Grey	70	1.16	2.5	2.7		8.5	0.9	3.4	5.5	6.0	6.5	7.5			6.5	7.5
	Green	105	1.41	3.5	2.7		9.0	0.9	3.4	6.0	6.0	7.0	7.5		9.0	8.0	8.5
	Orange	120	1.50	4.5	2.7		9.0	0.9	4.0	6.0	6.0	7.0	8.0		9.0	8.0	9.0
	Yellow	160	1.73								6.5	8.0	8.0	8.0	9.0	9.0	9.5
	Blue	200	1.92									8.0	8.5	8.5	9.0	9.0	10.0
	Ivory	235	2.07										8.5	9.0	10.0	9.0	10.5
	Red	260	2.18										8.5	10.0	10.0	9.0	11.0
	Black	300	2.34										9.0	10.5	10.0	9.5	11.0
Green /0.94	Green	40	1.41	2.0	1.2		2.8	0.8	3.5	2.5	4.0					4.5	6.0
Orange /1.16	Orange	70	1.50	2.2	2.2		5.0	0.8	3.5	4.5	5.0					6.0	7.5
Yellow /1.40	Yellow	90	1.73	2.5	2.5		5.5	0.9	4.0	5.0	5.5					6.0	8.0
Blue /1.50	Blue	120	1.92	2.5	2.7		7.0	1.0	4.0	6.0	6.0					6.5	8.0

* Inverted swivel tested at 0.6 and 1.8 m ** Only for upright uses

© NAANDANJAIN Ltd. 02/2011

NAANDANJAIN Irrigation

HADAR 7110

For irrigation, propagation and micro-climate

APPLICATIONS

- Horticulture and viticulture
- Orchards
- Greenhouses and nurseries
- Landscapes

STRUCTURE AND FEATURES

- Bayonet coupling
- Modular construction for simple use and modification
- Wide range of wetted patterns with 9 different inserts
- 11 color-coded nozzles with flow rates from 23-333 l/h
- Excellent water distribution
- Leakage Prevention Device (LPD)

TECHNICAL DATA

- Recommended working pressure: 1.5-3.0 bar
- Wetted diameter: 1.7-11.0 m
- Filtration requirements:
  130 micron (120 mesh) for nozzles 0.8-1.2 mm
  200 micron (80 mesh) for nozzle 1.3 mm and more

© NAANDANJAIN Ltd. 02/2011

WETTED DIAMETER (m) AT 2.0 BAR

Nozzle size (mm)	Nozzle color	Flow rate (l/h)	Mist sprayer	Small sprayer	Extra-range and insect-resistant sprayer	Half-circle (180°) sprayer	Mini-range rotor 40L	Medium-range rotor	Extra-range rotor	Inverted rotor*
0.8	Black	33	2.0	2.2						
0.9	Grey	41	2.1	2.3	2.4		6.0			
1.0	Purple	50	2.3	2.4	3.0			6.6		8.4
1.1	Red	61	2.4	2.6	3.2			7.0		8.5
1.2	Orange	75	2.6	2.8	3.6			7.5		9.0
1.3	Green	87	3.0	2.9	3.6	3.0		8.5		9.5
1.4	Blue	103	3.3	3.1	3.6	3.1			9.4	10.0
1.6	Yellow	128	3.6	3.0	3.7	3.3			9.6	10.2
1.8	Bright Green	166	4.1	3.0	3.8	3.4			10.2	10.6
2.0	White	199	4.4	3.2	3.9	3.5			10.4	11.0
2.3	Brown	265	5.4		4.2	3.7			10.6	

*Tested at 2.0 m above ground

7110/98
Inverted rotor with LPD

7110 mist sprayer
4.0 mm inserted base

Leakage Prevention Device (Super LPD)

PERFORMANCE TABLE 7110 INVERTED ROTOR AT 2 BAR PRESSURE

Nozzle (mm)	Nozzle color	Flow rate (l/h)	Diameter (m)	Precipitation (mm/h) Spacing (m)								
				3x3	3x4	3x5	4x4	4x5	4x6	5x5	5x6	6x6
1.3	Green	87	9.5	8.9	6.7	5.3	5.0	4.0		3.2		
1.4	Blue	103	10.0	6.4	5.1	4.9	4.3	4.1		3.6		
1.6	Yellow	128	10.2	7.4	6.0	5.7	5.0	4.8	5.0	4.3	4.0	3.3
1.8	Bright Green	166	10.6	9.0	7.2	6.9	6.0	5.8	6.0	5.1	4.8	4.0
2.0	White	199	11.0	10.5	8.4	8.0	7.0	6.7	7.0	6.0	5.6	4.7

*Tested at 2.0 m above ground

Color code distribution uniformity	CU<85%	CU=85-88%	CU=89-92%	CU>92%

MIST SPRAYER FOR PROPAGATION

- Spacing on line: 1.0 m
- Spacing between laterals: two laterals for 1.4-1.6 m table width
  single lateral for 1.2 m table width
- Recommended working pressure: 2.5-4.0 bar

© NAANDANJAIN Ltd. 02/2011

AQUAMASTER 2005

Economical solution for undertree and greenhouse and overhead irrigation

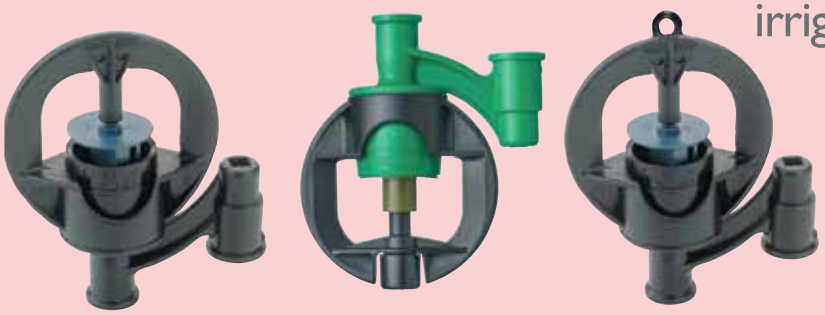

APPLICATIONS

- For widely-spaced plantations such as walnut, almond, avocado and mango
- For overhead irrigation of vegetables and nurseries
- IrriStand systems (up to 6 x 6 m spacing)

STRUCTURE AND FEATURES

- Extra-long range
- Simple, user-friendly structure
- Uniform coverage over a wide range of spacings, flow rates and pressures
- Insect-resistant nozzle
- Large droplets
- Innovative spike
- Inverted version available for tunnels and greenhouses

© NAANDANJAIN Ltd. 02/2011

TECHNICAL DATA

- Recommended working pressure: 1.5-3.0 bar
- Recommended working pressure (inverted version): 2.0-3.0 bar
- Flow rate: 30-365 l/h
- Wetted diameter: 5.5-12.5
- Filtration requirements: purple and brown nozzles -130 microns
  other nozzles -200 microns

COMPONENTS

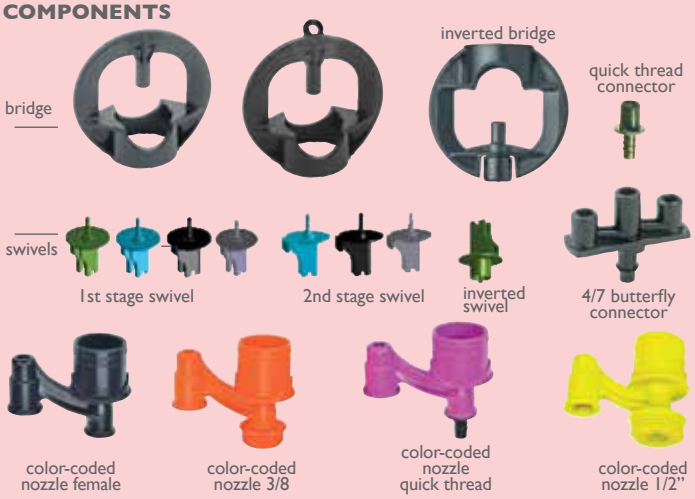

FLOW RATES AND WETTED DIAMETER

			1.5 bar		2.0 bar		2.5 bar	
Swivel color	Nozzle color	Nozzle (mm)	l/h	D (m)	l/h	D (m)	l/h	D (m)
Black	Violet	0.80	30.3	5.5	35	5.5	39.1	5.5
	Brown	0.94	43.3	6.5	50	6.5	55.9	6.5
Blue	Grey	1.14	60.6	7.0	70	7.0	78.3	7.0
	Green	1.40	90.9	8.5	105	9.0	117.4	9.0
Green	Orange	1.50	103.9	9.0	120	9.5	134.2	9.5
	Black	1.74	138.6	9.5	160	9.5	178.9	10.0
	Blue	1.94	173.2	10.5	200	10.0	223.6	11.0
	Yellow	2.16	215.0	10.5	250	11.5	305.0	12.0
	Red	2.36	260.0	12.0	300	12.5	365.0	12.5

FLOW RATES AND WETTED DIAMETER (m) AT 2.0 BAR

Swivels - Wetted diameter (m)									
Nozzle color	Flow rate (l/h)	Nozzle (mm)	Black		Blue		Grey		Green
			1st stage	2nd stage	1st stage	2nd stage	1st stage	2nd stage	
Violet	35	0.80	2.0	5.5					
Brown	50	0.94	2.0	6.5					
Grey	70	1.14			2.5	7.0			
Green	105	1.40			3.0	9.0			
Orange	120	1.50					2.0	5.5	9.5
Black	160	1.74					2.5	6.0	10.0
Blue	200	1.94					2.5	6.0	10.5
Yellow	250	2.16					3.0	6.0	11.5
Red	300	2.36					3.0	7.0	12.5

*Tested diameter at 0.25m height

PERFORMANCE TABLE FOR IRRISTAND APPLICATION

Precipitation rate (mm/h) Spacing (m)							
Swivel	Nozzle color	Flow rate (l/h)	D (m)	3x3	4x4	5x5	6x6
Blue	Grey	70	7.0	7.8	4.4		
	Green	105	9.0	11.6	6.5		
Green	Orange	120	9.5	13.3	7.5	4.8	3.3
	Black	160	10.0	17.8	10.0	6.4	4.5
	Blue	200	10.5	22.3	12.6	8.0	5.6
	Yellow	250	11.5	27.8	15.7	10.0	7.0
	Red	300	12.5	32.9	18.5	11.8	8.2

*Tested at 0.6 m height and 2.0 bar pressure

INVERTED MODEL - FLOW RATES AND WETTED DIAMETERS AT PRESSURE 2.0 BAR

Swivel color	Nozzle color	Nozzle (mm)	Flow rate (l/h)	D (m)
Green inverted	Violet	0.80	35	6.5
	Brown	0.94	50	7.5
	Grey	1.14	70	9.0
	Green	1.40	105	10.0
	Orange	1.50	120	10.5
	Black	1.74	160	11.0
	Blue	1.94	200	11.5

*Tested at 1.8 m height

PERFORMANCE TABLE FOR INVERTED APPLICATION

Precipitation rate (mm/h) Spacing (m)							
Nozzle color	Nozzle (mm)	Flow rate (l/h)	3x3	4x4	4x6	5x5	6x6
Grey	1.14	70	7.7	4.4	2.9	2.8	1.9
Green	1.40	105	11.7	6.6	4.4	4.2	2.9
Orange	1.50	120	14.0	7.9	5.3	5.1	3.5
Black	1.74	160	17.5	9.9	6.6	6.3	4.4

*Tested at 1.8 m height and 2.0 bar pressure

Color code distribution uniformity	CU<85%	CU=85-88%	CU=89-92%	CU>92%

HEAD LOSS (m) 1.0m Tube Length

		3/8" thread, 1/2" thread & female connections			Quick thread connection
Nozzle color	Flow rate (l/h)	4/7 PVC tube	5/8 PE tube	7/10 PVC tube	4/7 PES tube
Violet	35	0.8	0		0.9
Brown	50	1.2	0.1		1.1
Grey	70	1.3	0.5		1.7
Green	105	1.7	0.9		3.7
Orange	120	2.6	1.4		4.5
Black	160	4.6	2.4		
Blue	200			1.2	
Yellow	250			1.3	
Red	300			1.6	

© NAANDANJAIN Ltd. 02/2011

AQUASMART 2002

Flow-regulating micro-sprinkler

APPLICATIONS

- For optimal undertree irrigation

STRUCTURE AND FEATURES

- Constant flow between 1.5-4.0 bar pressure
- Uniform irrigation and fertigation in all topographical conditions
- Wide range of flow rates and distribution patterns
- Insect-proof nozzle
- Sturdy and solid structure
- Easy to dismantle and assemble
- Innovative spike with locking clip and water-stop aid
- Deflector helps prevent wetting of tree trunks
- Special swivel (green) for inverted operation
- Two-stage wetted diameter control
- Clog resistant even at lowest flow rates

© NAANDANJAIN Ltd. 02/2011

TECHNICAL DATA

- Recommended working pressure: 1.5-4.0 bar
- Flow rate: 20-95 l/h
- Wetted diameter: 3.0-7.5 m

COMPONENTS

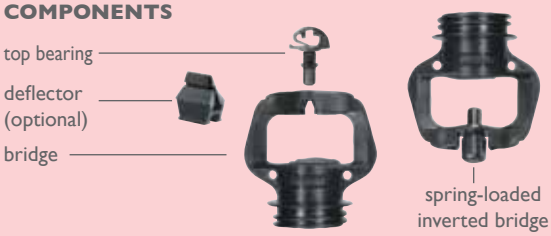

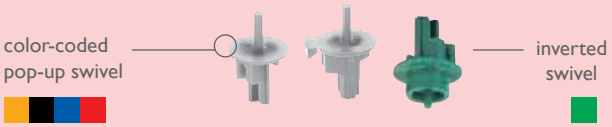

* 1st stage: with diameter limiter, for young trees
** 2nd stage: break off the diameter limiter, for mature trees

SWIVELS - WETTED DIAMETER (m)

			Orange*	Black	Blue	Green (inverted)**	Red
Nozzle color	Flow rate (l/h)	Nozzle (mm)					
Violet	28	0.84	3.0	3.5			
Grey	20	1.00	3.0	4.0	4.5	5.0	
Brown	35	1.10	3.5	4.0	5.0	5.0	
Blue	47	1.25	3.5	4.5	5.5	5.0	
Green	55	1.33	3.5	4.5	6.0	5.0	
Orange	70	1.48		5.0	7.0	5.0	
Yellow	95	1.75		5.5	7.5	5.0	
Red XL	35	0.94					7.0
Black Xl	40	1.00					7.0
Ivory XL	47	1.10					7.0

All swivels tested at 0.25 m above ground
* One stage only (no diameter limiter)
** Green swivel tested at 0.6 m above ground

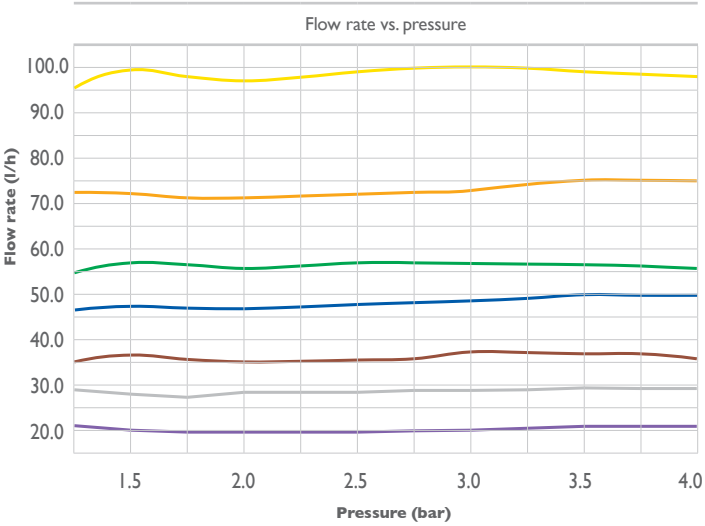



Housings

STANDARD ASSEMBLIES

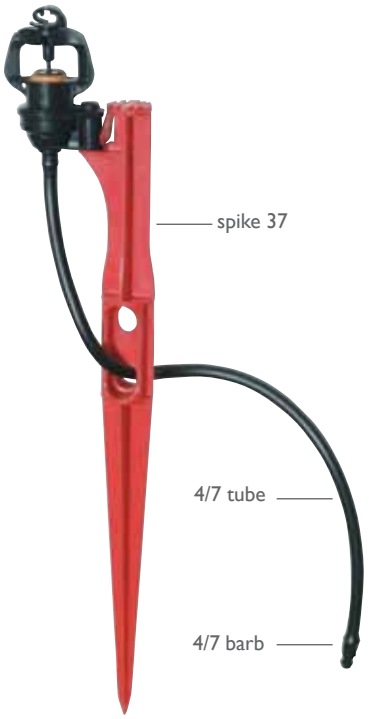

© NAANDANJAIN Ltd. 02/2011

DAN 2001

Flow-regulating micro-sprinkler

APPLICATIONS

- Ideal for undertree irrigation
- Excellent for cooling and frost protection

STRUCTURE AND FEATURES

- Constant flow between 1.5-4.0 bar pressure
- Numerous options of flow rates and distribution patterns
- Uniform irrigation and fertigation in all topographical conditions
- Insect-proof nozzle

© NAANDANJAIN Ltd. 02/2011

TECHNICAL DATA

- Recommended working pressure: 1.5-4.0 bar
- Filtration requirements: 35 l/h or lower -130 microns (120 mesh)
  47 l/h or higher -200 microns (80 mesh)

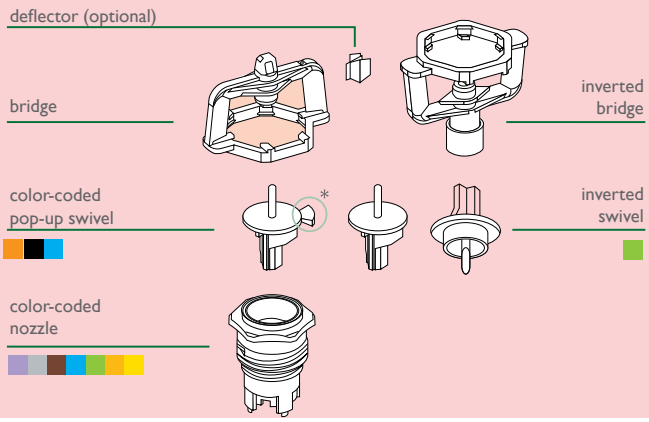

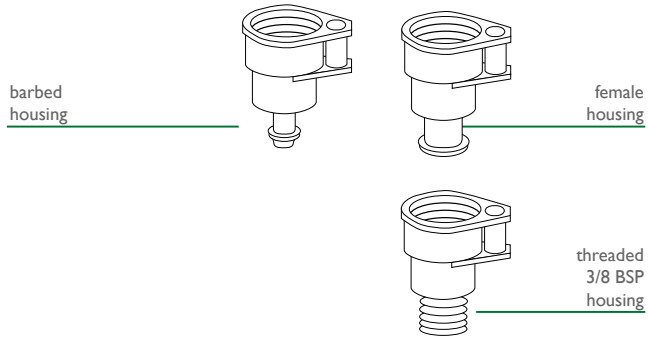



FLOW RATES WETTED DIAMETER (m)

Nozzle color	Flow rate (l/h)	Nozzle (mm)	Swivels			
			Orange*	Black	Blue	Green (inverted)**
Violet	20	0.84	3.0	3.5		
Grey	28	1.00	3.0	4.0	4.5	5.0
Brown	35	1.10	3.5	4.0	5.0	5.0
Blue	47	1.25	3.5	4.5	5.5	5.0
Green	55	1.33	3.5	4.5	6.0	5.0
Orange	70	1.48		5.0	7.0	5.0
Yellow	95	1.75		5.5	7.5	5.0

All swivels tested at 0.25 m above ground
* One stage only (no diameter limiter)
** Green swivel tested at 0.6 m above ground

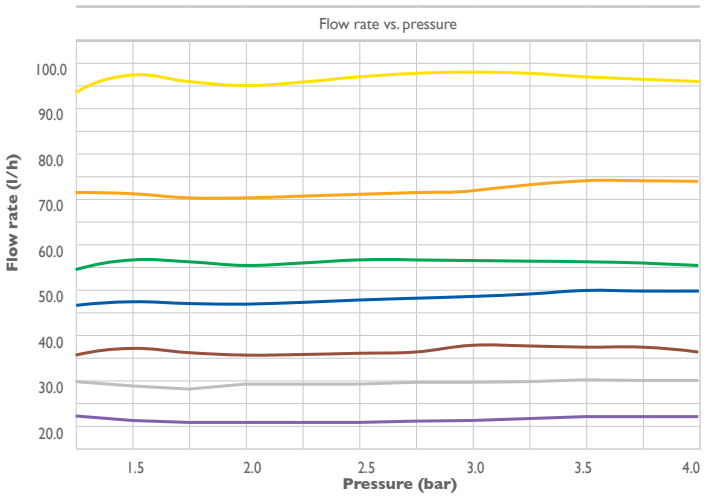

STANDARD ASSEMBLIES

© NAANDANJAIN Ltd. 02/2011

NAANDANJAIN Irrigation

ELIMINATOR

Insect-proof flow regulating micro-sprinkler for undertree irrigation

STRUCTURE AND FEATURES

- Prevents intrusion of all insects, including ants, snails, earwigs, spiders and Fuller's rose weevil
- Resistant to dust, sand, weeds and other external elements
- Flow-regulating for water saving and optimal efficiency
- Reliable, maintenance-free performance
- Wide range of flow rates and distribution patterns

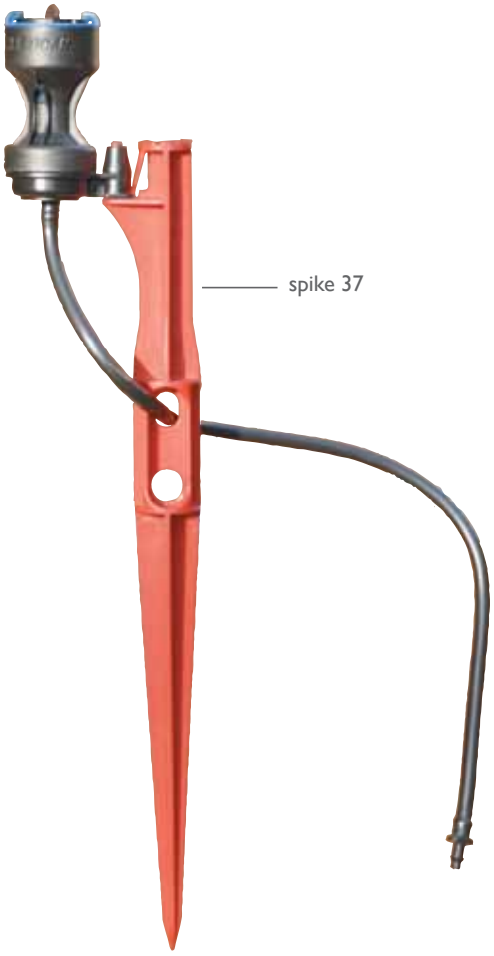

© NAANDANJAIN Ltd. 02/2011

TECHNICAL DATA

- Recommended working pressure: 1.5-4.0 bar
- Flow rate: 20-95 l/h
- Diameter coverage: 4.0-7.5 m
- Two-stage wetted diameter control

1st stage: with diameter limiter, for young trees

2nd stage: break off the diameter limiter, for mature trees

Special pop-up nozzle locks between irrigation cycles

PERFORMANCE TABLE

Regulator & nozzle bridge color	Flow rate (l/h)	Swivel color	Wetted diameter (m)
Purple	20	Black	4.0
Grey	28	Black	5.0
Brown	35	Black	5.5
Black	40	Black	5.5
Blue	47	Black	6.0
Green	55	Black	6.0
Orange	70	Blue	7.0
Yellow	95	Blue	7.0

*Stage 1: Wetted diameter is 2-2.5 less than in stage 2

HOUSINGS

© NAANDANJAIN Ltd. 02/2011

NAANDANJAIN
Irrigation

DAN-JET PC

Flow-regulating micro-jet

APPLICATIONS

- For undertree, vineyard and landscape irrigation

STRUCTURE AND FEATURES

- Low maintenance static ray-jet
- Pressure compensating-constant flow rate over wide pressure range
- Diverse distribution patterns and wetted diameters
- High resistance to clogging
- Floating regulation membrane allows spacious water pathways
- Large number of spreader and nozzle combinations

© NAANDANJAIN Ltd. 02/2011

CONNECTORS

4/7 barb

parallel

quick thread

TECHNICAL DATA

- Recommended working pressure: 1.0-3.0 bar
- Flow rate: 19-76 l/h
- Filtration requirements:
  black, orange and blue nozzles -130 microns (120 mesh)
  violet, green and red nozzles -200 microns (80 mesh)

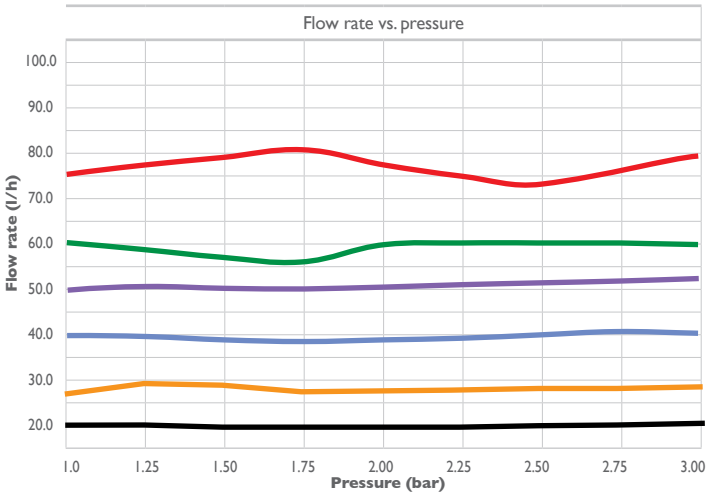

PERFORMANCE TABLE

Nozzle color	Flow rate (l/h)	Nozzle diameter (mm)
Black	19	0.89
Orange	28	1.17
Blue	38	1.30
Violet	47	1.55
Green	57	1.65
Red	76	1.93

DISTRIBUTION PATTERNS AND DIAMETERS (m)
TESTED AT 2.0 bar, 0.25 m HEIGHT

Nozzle color	Static Spreaders								
	Strip	300°	12 jets	16 jets	20 jets	180° (radius)	Inverted*	Flat (no jets)	Strip flat (no jets)
Black	2.4	3.0	3.2	3.0	2.4	1.5	2.5	2.4	2.0
Orange	2.6	3.2	3.6	3.2	2.8	1.7	3.3	2.6	2.2
Blue	3.2	4.0	4.4	4.6	3.6	2.2	3.8	3.0	
Violet	3.8	4.4	4.8	4.8	4.0	2.4	4.0	3.1	
Green	4.8	4.8	5.0	5.0	4.6	2.7	4.3	3.4	
Red	5.0	5.6	5.4	5.4	5.2	2.8	4.8	3.6	

*Tested at 0.6 m height

© NAANDANJAIN Ltd. 02/2011

NAANDANJAIN
Irrigation

TURBO-JET

Low-maintenance micro-jet

APPLICATIONS

- For orchard, vineyard and landscape irrigation

STRUCTURE AND FEATURES

- Low maintenance emitter
- High resistance to clogging
- Diverse distribution patterns and wetted diameters
- Easy to open and clean
- Unique nozzle structure creates turbulent flow and wide water pathways
- Large number of nozzle and spreader combinations

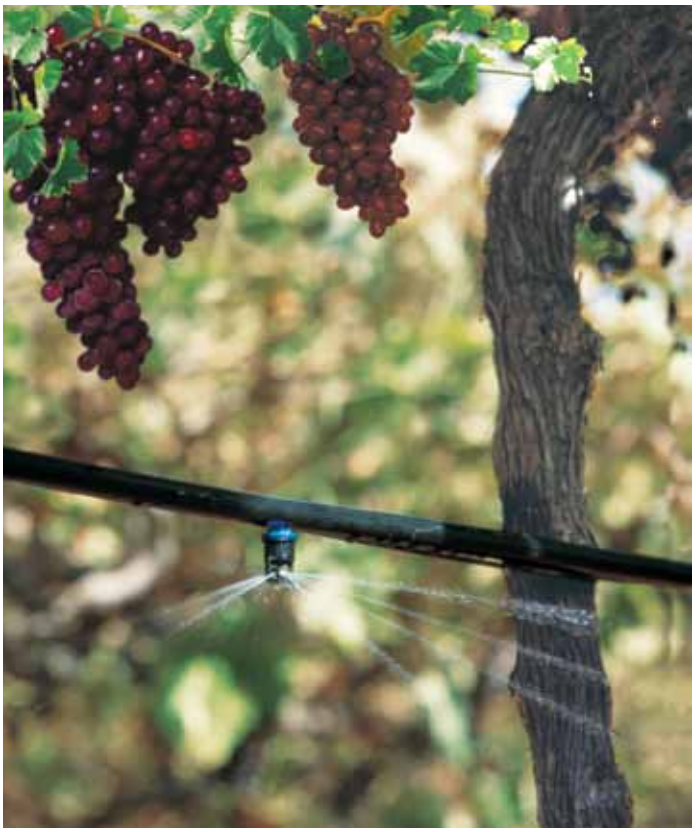

© NAANDANJAIN Ltd. 02/2011

CONNECTORS

4/7 barb

parallel

quick thread

TECHNICAL DATA

- Recommended working pressure: 1.0-3.5 bar
- Flow rate: 16-110 l/h
- Filtration requirements:
  black, orange and blue nozzles -130 microns (120 mesh)
  violet, green and red nozzles -200 microns (80 mesh)

FLOW RATES BY NOZZLE (l/h)

Pressure (bar)	Nozzle color/diameter (mm)					
	Black 0.80	Orange 1.00	Blue 1.15	Violet 1.30	Green 1.40	Red 1.65
1.0	16	23	31	40	48	62
1.4	19	28	37	47	57	76
2.0	23	33	43	56	69	88
2.5	25	36	47	63	75	98
3.0	27	38	50	69	80	105
3.5	29	41	53	74	85	111

DISTRIBUTION PATTERNS AND DIAMETERS (m)
TESTED AT 1.4 & 2.0 bar, 0.25 m HEIGHT

Nozzle color	Static Spreaders																	
	Strip		300°		12 jets		16 jets		20 jets		180° (radius)		Inverted*		Flat (no jets)		Strip flat (no jets)	
	1.4 bar	2.0 bar	1.4 bar	2.0 bar	1.4 bar	2.0 bar	1.4 bar	2.0 bar	1.4 bar	2.0 bar	1.4 bar	2.0 bar	1.4 bar	2.0 bar	1.4 bar	2.0 bar	1.4 bar	2.0 bar
Black	2.7	3.0	3.2	3.8	3.4	4.1	3.1	4.2	3.4	3.2	1.5	2.2	2.8	3.0	2.2	2.2	2.3	2.4
Orange	3.0	3.7	4.0	4.4	4.3	4.7	4.0	5.6	3.6	4.0	1.8	2.3	3.2	3.8	2.3	2.4	2.4	2.5
Blue	3.7	4.2	4.8	5.6	4.6	4.9	4.2	6.0	3.8	4.4	2.2	2.4	3.8	4.8	2.4	2.6		
Violet	4.2	5.4	5.0	5.8	4.8	5.2	4.3	6.0	4.0	5.0	2.2	2.5	4.6	5.2	2.6	3.0		
Green	4.2	5.4	5.4	6.0	5.2	5.9	4.5	6.2	4.2	5.4	2.3	2.7	4.9	5.4	2.8	3.2		
Red	4.8	6.1	6.6	7.6	5.6	6.6	5.4	7.2	5.0	6.2	2.4	2.8	5.2	5.8	3.0	3.4		

*Tested at 0.6 m height

© NAANDANJAIN Ltd. 02/2011

NAANDANJAIN
Irrigation

FLIPPER

The most economical frost protection for vineyards

STRUCTURE AND FEATURES

- Spreads water in a very long and narrow strip, targeting the vine rows only
- Saves up to 70% of water compared to conventional overhead systems
- Large droplets minimize the cooling effect when starting the system
- Safe operation under frost conditions
- Optional flow regulator for hilly terrain or long rows
- Low installation and pumping costs
- Dry pathways reduce waterlogging and facilitate access for workers and equipment soon after operation

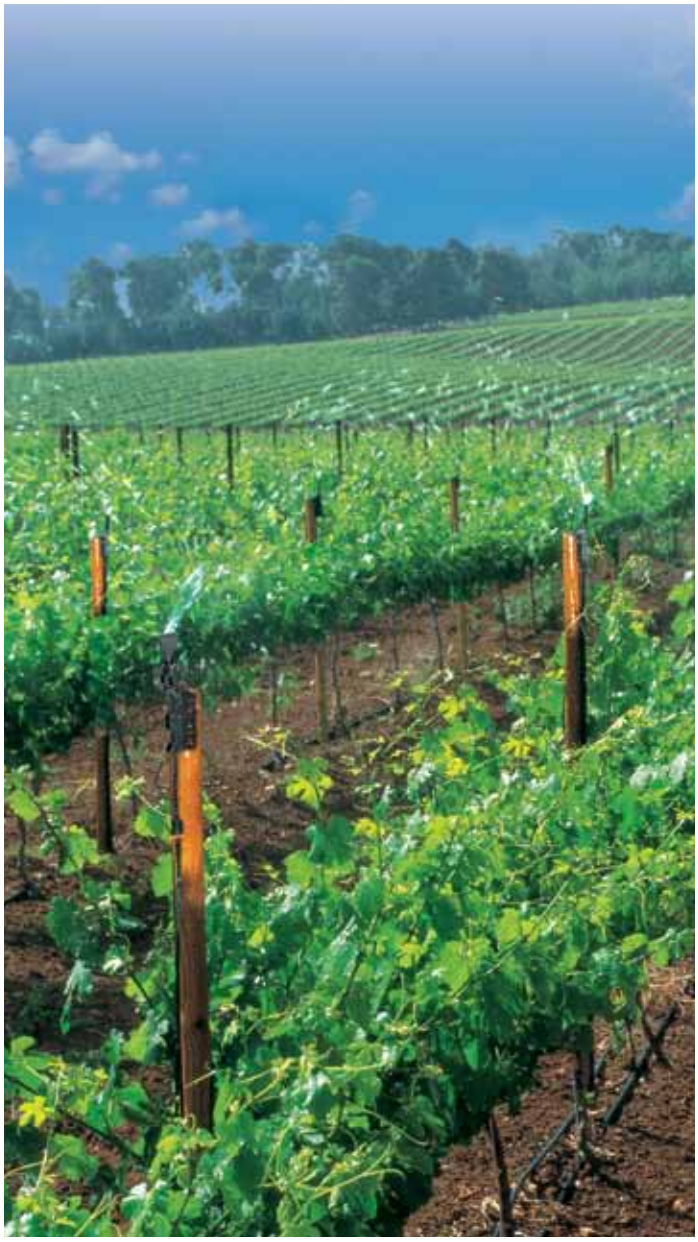

© NAANDANJAIN Ltd. 02/2011

COMPONENTS

Flipper

Optional protecting box

Stabilizer

Flow Regulators

25 l/h | 35 l/h | 43 l/h

TECHNICAL DATA

- Recommended working pressure: 2.0-3.0 bar
- Flow rate: 25-45 l/h
- Filtration requirements: 130 microns (120 mesh)

TIPS FOR INSTALATION & OPERATION

- Ensure that the water stream is in line with the vine rows.
- Anchor the Flipper firmly to the post.
- Start the system before the critical damaging temperature is reached.
- To decide on a suitable start-up temperature, consider the dew points (see chart below).
- Stop the system only when the outside temperature is constant above 1°C.

PERFORMANCE TABLE

Nozzle color	Flipper color	Flow rate (l/h) (at 2 bar)	Maximal recommended spacing (m) between flippers**
Black	Black	25*	6.0
Violet	Black	35*	7.0
Brown	Brown	43*	9.0

* For regulated unit: 2.5-4.0 bar
** When Flippers mounted 1.0 m above the target

AMOUNT OF WATER (m^3/ha/hr) REQUIRED BY FLIPPER FROST PROTECTION SYSTEM* AND WATER SAVING COMPARED TO CONVENTIONAL 40 m^3/ha/hr SYSTEM

Nozzle color	Vineyard with 3.0 m row spacing	% of water saving	Vineyard with 2.5 m row spacing	% of water saving
Black	14.0	65	16.0	58
Violet	16.6	58	20.0	50
Brown	16.0	60	19.0	52

*When Flippers are at maximal spacing, at 2 bar pressure

RECOMMENDED START-UP TEMPERATURES FOR FROST PROTECTION AT VARIOUS DEW POINTS															
Dew point temp. (°C)	-9.5	-9.0	-8.5	-8.0	-7.5	-6.5	-6.0	-5.5	-5.0	-4.5	-4.0	-3.5	-3.0	-2.0	-1.5
Start-up temp. (°C)	+4.0	+4.0	+3.5	+3.5	+3.0	+3.0	+3.0	+2.0	+2.0	+1.5	+1.5	+1.0	+1.0	+0.5	+0.5

© NAANDANJAIN Ltd. 02/2011

NAANDANJAIN
Irrigation

GREEN SPIN

Non-drip inverted micro sprinkler
Ideal for overhead irrigation in greenhouses

STRUCTURE AND FEATURES

- Bridgeless-no dripping during operation
- No deflection or "dead corners"
- Low trajectory, no water above nozzle level
- Superior uniformity over a wide range of spacings
- Connections to PE or PVC pipes
- Optional Leakage Prevention Device (LPD) prevents drainage after shut-off
- Patent pending
- Tapered or bayonet connection

© NAANDANJAIN Ltd. 02/2011

COMPONENTS

color-coded nozzle

color-coded swivel

TECHNICAL DATA

- Recommended working pressure: 2.0-3.0 bar
- Flow rate: 43-200 l/h
- Filtration requirements:
  brown and grey nozzles -130 microns
  green, orange, black and blue nozzles -200 microns

FLOW RATES (l/h) AND WETTED DIAMETER (m) AT 2.0 BAR

Swivel color	Nozzle color	Flow rate (l/h)	Wetted diameter* (m)
Brown	Brown	43	5.5
Blue	Grey	70	6.0
	Green	105	7.5
	Orange	120	8.0
	Black	160	8.5
	Blue	200	8.5

*Tested at 1.8 m above ground

PERFORMANCE TABLE GREEN SPIN AT 2 BAR PRESSURE

Precipitation rates (mm/h) and uniformity (CU) at various spacings (m)												
Distance between laterals (m)			3					4				
Distance between heads (m)			1.0	1.5	2.0	2.5	3.0	1.0	1.5	2.0	2.5	3.0
Brown swivel	Brown	43 LPH	14.3	9.5	7.2	5.7	4.8					
Blue swivel	Grey	70 LPH	23.1	15.4	11.5	9.2	7.7	17.3	11.5	8.7	6.9	5.8
	Green	105 LPH	34.8	23.2	17.4	13.9	11.6	26.1	17.4	13.1	10.4	8.7
	Orange	120 LPH	39.8	26.5	19.9	15.9	13.3	29.9	19.9	14.9	11.9	10.0
	Black	160 LPH	53.3	35.5	26.7	21.3	17.8	40.0	26.7	20.0	16.0	13.3
	Blue	200 LPH	66.7	44.5	33.3	26.7	22.2	50.0	33.3	25.0	20.0	16.7

*Tested at 1.8 m above ground

Color code distribution uniformity	CU<85%	CU=85-88%	CU=89-92%	CU>92%

© NAANDANJAIN Ltd. 02/2011

NAANDANJAIN
Irrigation

GREEN MIST

LPD

Green Mist nozzle

Double-purpose emitter for misting and irrigation over propagation benches

STRUCTURE AND FEATURES

- Uniform coverage
- Ideal droplet size prevents drift of fine mist
- No dripping during operation
- Symmetrical water distribution with no deflection or "dead corners"
- Low pressure Leakage Prevention Device (LPD) for perfect pulsed operation
- Low cost

© NAANDANJAIN Ltd. 02/2011

TECHNICAL DATA

- Recommended working pressure: 2.0-3.5 bar
- Flow rate: 30-40 l/h
- Filtration requirements: 130 microns (120 mesh)
- Wetted diameter: 1.2 m

INSTALLATION INSTRUCTIONS

- Height of units above bench: 1.0-1.2 m
- Max. spacing between units on lateral: 0.8 m
- Max. spacing between laterals: 0.8 m
- Max. distance of lateral from bench edge: 0.1 m

FLOW RATE VS. PRESSURE

Pressure (bar)	2.0	2.5	3.0	3.5
Flow (l/h)	30	34	37	40

SCHEMATIC LAYOUT OF PVC INSTALLATION

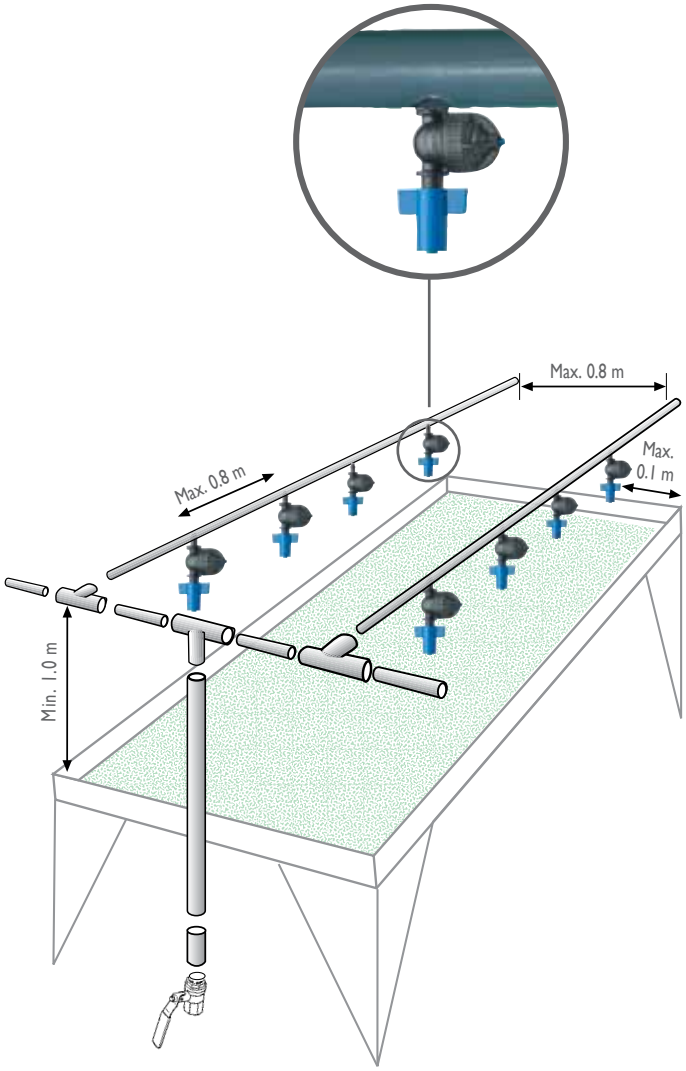

© NAANDANJAIN Ltd. 02/2011

NAANDANJAIN
Irrigation

FOGGER

For optimal cooling or humidifying of greenhouses

STRUCTURE AND FEATURES

- Reduces greenhouse temperature
- Increases greenhouse humidity
- Fine droplets (average 55 microns)
- Provides perfect conditions for plant propagation
- LPD (Leakage Prevention Device) for simultaneous start-up and shut-down of the system

OPTIONAL NOZZLES

Color	Blue	Orange	Red	Black
Flow rate l/h at 4.0 bar	7.0	14.0	21.0	28.0

© NAANDANJAIN Ltd. 02/2011

PROPAGATION SYSTEMS

STRUCTURE AND FEATURES

- Extra fine droplet size (55 microns)
- Range of flow rates for different precipitation rates
- High water distribution uniformity and coverage

TECHNICAL DATA

- Recommended working pressure: 4.0 bar
- Multiple flow rates: 7.0 (standard), 14, 21 and 28 l/hr
- Filtration requirements: 130 microns (120 mesh)
- Minimum installation height: 1.0 m
- Max. spacing between units on lateral: 1.2 m
- Max. spacing between lateral: 1.2 m
- Max. distance of lateral from bench edge: 0.2 m

FOGGER FLOW RATE ON CROSS

Color	Pressure (bar)	Flow rate (l/h)
Blue	4.0	28
Orange	4.0	56
Red	4.0	84
Black	4.0	112

Fogger Accessories

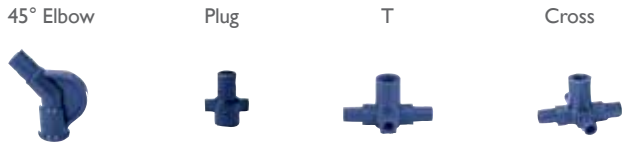

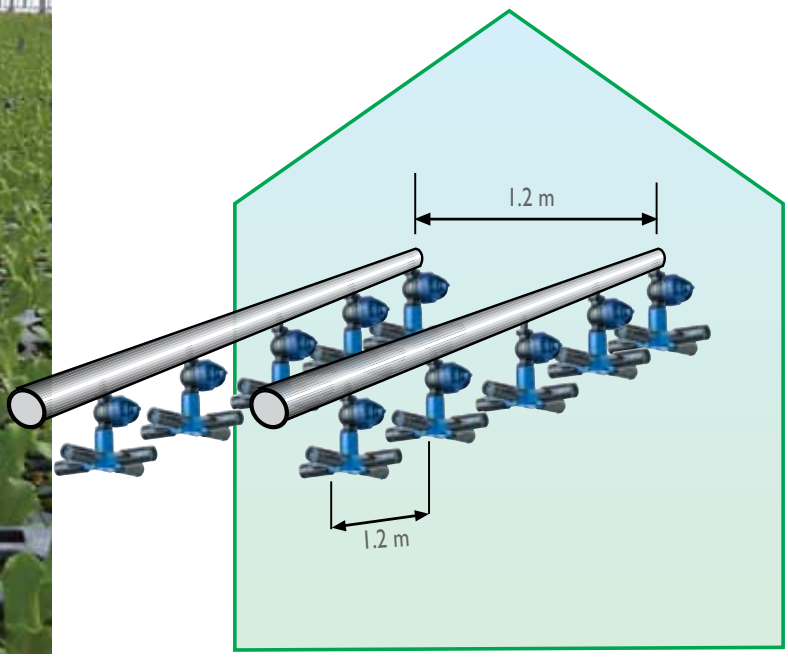

© NAANDANJAIN Ltd. 02/2011

NAANDANJAIN Irrigation

SUPER FOGGER

Super Fogger 4/7 barb

Super Fogger female

Super Fogger 3/8" thread

Optimal solution for cooling, humidifying and pesticide spraying in greenhouses

STRUCTURE AND FEATURES

- Built-in LPD (Leakage Prevention Device)
- Very small droplets (average of 55 microns) for minimal foliage wetting during pulsed operation
- Excellent coverage when used for pesticide application
- Easy installation and service
- Chemical resistant raw materials
- PE and PVC connections
- Low cost

TECHNICAL DATA

- Recommended working pressure: 4.0 bar
- Flow rate: 13 l/h (2 x 6.5 l/h outlets)
- Filtration requirements: max. 130 microns (120 mesh)
- Recommended spacing:
- For cooling and humidifying only:
  3.0-4.0 m between laterals
  2.0-3.0 m between Super Foggers
- For cooling, humidifying and spraying:
  2.0-3.0 m between laterals
  1.5 m between Super Foggers

© NAANDANJAIN Ltd. 02/2011

HURRICANE

Reliable, low-maintenance micro-jet

Hurricane 4/7 barb

Hurricane quick thread

APPLICATIONS

- For dense orchards and plantations

STRUCTURE AND FEATURES

- Static ray-jet
- Vortex technology facilitates wide water passages and high resistance to clogging
- Low flow rate
- Large droplets-suitable for irrigation in windy conditions
- Full-circle spray pattern facilitates excellent water distribution
- Two kinds of connectors available:
  - Barbed connector (4/7) for PVC tube 4/7
  - Quick-threaded connector for PES tube 4/7

TECHNICAL DATA

- Recommended working pressure: 1.5-2.5 bar

FLOW RATE

Nozzle color	Flow rate* (l/h)	Wetted diameter* (m)
Black	27	2.8
Blue	35	3.2

*Tested at 1.5 bar

Flow rate vs. pressure

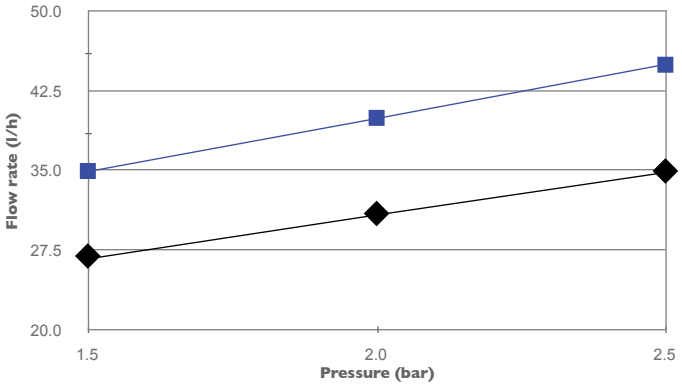

© NAANDANJAIN Ltd. 02/2011

NAANDANJAIN
Irrigation

SUPER LPD

Low pressure

Barb 4/7

Female

Thread 3/8"

High pressure

Super LPD low-pressure bayonet for GreenSpin and Hadar 7110

Bayonet x Bayonet

Thread 3/8"

Barb 4/7

STRUCTURE AND FEATURES

- Prevents drainage through emitters
- High and low opening and closing pressure
- Keeps system filled with water under pressure, enabling immediate start-up
- Allows all units to start-up or shut-down simultaneously
- Modular-fits all NaanDan Jain micro-sprinklers
- **Tapered or bayonet connection (bayonet available only with black low-pressure LPD)**
- Minimal pressure loss, even with high flow rates
- One-stage opening-Super LPD is either completely opened or completely closed
- Easily dismantled for cleaning and maintenance
- PE and PVC connections

Two types of Super LPD are available:

- Black: Low-pressure Super LPD for micro-sprinklers
- Blue: High-pressure Super LPD for foggers

OPERATING PRESSURE (bar)

	Low-pressure LPD	High-pressure LPD
Opening	~1.4	~4.0
Closure	~0.6	~2.4

© NAANDANJAIN Ltd. 02/2011

APPLICATION EXAMPLES

Modular inverted green swivel
with low-pressure Super LPD female

Hadar 7110 mist sprayer
with Super LPD bayonet

Green Mist with
Super LPD 3/8"

4 Foggers on X
with high-pressure Super LPD 3/8"

© NAANDANJAIN Ltd. 02/2011

NAANDANJAIN
Irrigation

ACCESSORIES

Item #	
897030	Butterfly 3/8" x 4/7
897028	Butterfly 3/8" x 7/10
897010	Butterfly barb 4/7, black
897016	Butterfly 3/8"
897019	Butterfly barb 4/7, grey
897017	Butterfly quick thread
897012	Butterfly 1/4" thread
897013	Butterfly parallel
897011	Butterfly 7/10
897002	Head 3/8" BSP
897001	Head 1/2" BSP
790308	Low-pressure Super LPD, female (black)
790328	Low-pressure Super LPD, 4/7 (black)
790348	Low-pressure Super LPD, 3/8" (black)
790303	High-pressure Super LPD, female (blue)
790323	High-pressure Super LPD, 4/7 (blue)
790343	High-pressure Super LPD, 3/8" (blue)
790228	Low-pressure Super LPD bayonet, 4/7 (black)
790248	Low-pressure Super LPD bayonet, 3/8" (black)
790258	Super LPD bayonet / bayonet
J67202J1000	Stabilizer 13 cm for suspended stand

© NAANDANJAIN Ltd. 02/2011

ACCESSORIES

Item #		
897032	Barb 4/7 x 4/7	
897042	Parallel barb 4/7	
897065	Plug for barb 5/8 (male)	
897055	Fast-n-Fast plug	
790100	Fast-n-Fast connector	
897272	Socket 1/2" BSPT	
897270	Nipple 1/2" x 1/2"	
890300	Filter for Super LPD	

HADAR 7110, 2005 ACCESSORIES

Item #		
484921	1/2" bayonet base	
484931	3/8" bayonet base for rigid pipes	
497051	Bayonet female base	
497041	Bayonet male	
497031	Bayonet plug	

© NAANDANJAIN Ltd. 02/2011

NAANDANJAIN Irrigation

ACCESSORIES

BUTTERFLY STANDS

Item #	Standard lengths
797006	60 cm
797008	75 cm
797010	100 cm
797012	120 cm
797015	150 cm

SUSPENDED STANDS with stabilizer 13 cm and barb 4/7

	Item #	
1	797124	Suspended stand 30 cm and Fast-n-Fast
1	797129	Suspended stand 60 cm with Fast-n-Fast
2	797403	Suspended stand 30 cm for 7110 Hadar
2	797405	Suspended stand 60 cm for 7110 Hadar
3	797340	Suspended stand 30 cm with mini-valve for Modular
3	797343	Suspended stand 60 cm with mini-valve for Modular
4	797140	Suspended stand 30 cm with butterfly
4	797143	Suspended stand 60 cm with butterfly
5	797443	Suspended stand 30 cm + Super LPD (black for Modular)
5	797446	Suspended stand 60 cm + Super LPD (black for Modular)
6	797453	Suspended stand 30 cm + Super LPD (blue for Fogger)
6	797456	Suspended stand 60 cm + Super LPD (blue for Fogger)
7	797463	Suspended stand 30 cm + bayonet Super LPD (black)
7	797466	Suspended stand 60 cm + bayonet Super LPD (black)

SPIKES

	Item #	
1	897908	Spike 31 black
1	897907	Spike 31 red
2	897948	Spike 37 black
2	897947	Spike 37 red
3	897938	Spike 36 black
3	897937	Spike 36 red
4	897918	Spike 34 black
4	897917	Spike 34 red
5	496601	Spike for Hadar 7110

© NAANDANJAIN Ltd. 02/2011

ACCESSORIES

Item #		
897285	3.2 mm Punch	
6130210426	4 mm Punch	
6130210420	Punch drill 8 mm (other sizes available)	
820015	Wrench for Turbo-Jet	

© NAANDANJAIN Ltd. 02/2011

© 2011 NaanDanJain Ltd. All rights reserved.
All specifications are subject to change without notice.

© NAANDANJAIN Ltd. 01/2011 P116001

NAANDANJAIN Irrigation

NaanDanJain Irrigation (C.S.) Ltd.
Post Naan 76829, Israel. T:+972-8-9442180, F:+972-8-9442190
E: mkt@naandanjain.com www.naandanjain.com

The Standards Institution of Israel SI ISO 9001: 2008 Quality Assured Firm